


## K1-LED BAR 3X36W Pixel

## 110W Power LED Light

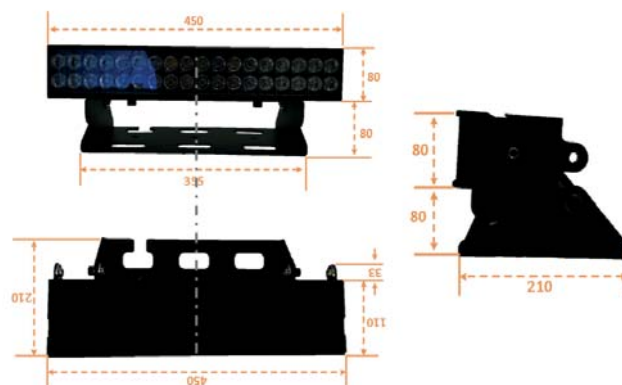

### K1-LED BAR Specification

<b>Power Supply</b>	Power Consumption	110W
	Power Input	100~240V AC, 50/60Hz
<b>Operational Parameters</b>	Max. Ambient Temperature	45°C
<b>Lighting System</b>	LED Type	36x Luxeon Rebel High-power LEDs
	Life Time	60,000h
	RGBW	R:9, G:9, B:9, W:9
<b>Optical System</b>	Main Lens	Narrow 8°
	Exchangeable Sub Lens	15°(Basic), 30°, 60°(Optional) & Various Elliptical
<b>Shutter / Dimmer</b>	Strobe-Effect	1~15 F.P.S
	Random-Strobe	Available
	Pulse-Effects	Available
	Continuous Dimmer	0~100%
<b>DMX Control</b>	Standard USITT DMX-512	3 Poles or 5 Poles
	DMX-Addressing	Starts at the DMX channel [001]
<b>Weight &amp; Measures</b>	Dimensions	450(W) x 80(L) x 130(H)
	Weight	8kg

| 개별 행거 사용 시



| 개별 스탠드 사용 시



| 4 in 1 행거 사용 시



| 4 in 1 브라켓 사용 시



| The table of K1-LED BAR DMX Channel

DMX Ch.	Mode 1	Mode 2	Function	Value	DMX	HEX	%
1	Red	Red	Color mixing	0% ~ 100%	0 ~ 255	00 ~ FF	0 ~ 100
2	Green	Green	Color mixing	0% ~ 100%	0 ~ 255	00 ~ FF	0 ~ 100
3	Blue	Blue	Color mixing	0% ~ 100%	0 ~ 255	00 ~ FF	0 ~ 100
4	White	White	Color mixing	0% ~ 100%	0 ~ 255	00 ~ FF	0 ~ 100
5	Strobe	Strobe	Shutter open		0 ~ 15	00 ~ 0F	0 ~ 5.5
			Random strobe		16 ~ 47	10 ~ 2F	6 ~ 18.8
			Strobe slow~fast	1 ~ 15Hz	48 ~ 239	30 ~ EF	19 ~ 94.5
			Shutter open		240 ~ 255	F0 ~ FF	95 ~ 100
6	Dimmer	Dimmer	Dimmer	0% ~ 100%	0 ~ 255	00 ~ FF	0 ~ 100
7		Color Palatte	Preset color	Black-Out	0 ~ 16	00 ~ 10	0 ~ 6
				White	17 ~ 30	11 ~ 1E	6.5 ~ 11.5
				Red	31 ~ 44	1F ~ 2C	12 ~ 17
				Deep Amber	45 ~ 58	2D ~ 3A	17.5 ~ 22.5
				Amber	59 ~ 72	3B ~ 48	23 ~ 28
				Orange	73 ~ 86	49 ~ 56	28.5 ~ 33.5
				Yellow	87 ~ 100	57 ~ 64	34 ~ 39
				Yellow Green	101 ~ 114	65 ~ 72	39.5 ~ 44.5
				Green	115 ~ 128	73 ~ 80	45 ~ 50
				Green Blue	129 ~ 142	81 ~ 8E	50.5 ~ 55.5
				Light Blue	143 ~ 156	8F ~ 9C	56 ~ 61
				Blue	157 ~ 170	9D ~ AA	61.5 ~ 66.5
				Medium Blue	171 ~ 184	AB ~ B8	67 ~ 72
				Dark Blue	185 ~ 198	B9 ~ C6	72.5 ~ 77.5
				Violet	199 ~ 212	C7 ~ D4	78 ~ 83
				Magenta	213 ~ 226	D5 ~ E2	83.5 ~ 88.5
Pink	227 ~ 240	E3 ~ FO	89 ~ 94				
Light Pink	241 ~ 254	F1 ~ FE	94.5 ~ 99.5				
Full White	255	FF	100				